


ASSEMBLY INSTRUCTIONS

1. Take a base part (①) and a T-piece (②), mount the T-piece in the middle of the base part. Use 2 screws, 2 washers and 2 nuts for this. Next, mount the support beam (③) by attaching it to the base part with 2 screws, washers and nuts each. To attach it to the T-piece, use 2 screws, washers, nuts and one of the longer plates (④).

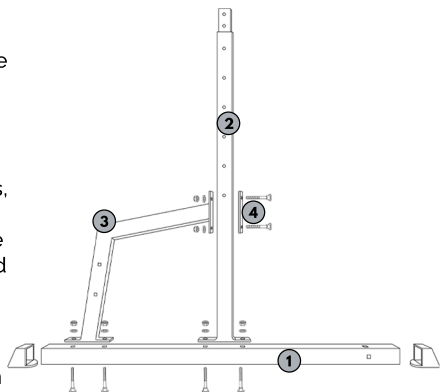

2. Make sure that you tighten all the screws well.

3. You can now place the plastic caps (E) on the end pieces of the base parts.

4. Repeat these steps mirrored on the other side. Make sure that the square holes of the T-piece are facing outwards.

